


The smallest member of the Tank series, equipped with Rush lock-on technology, has excellent stability and power accuracy. The silent setting ensures that the VTX will not disturb other pilots during the setting operation. The PIT mode allows you to start VTX at any time, even when the racing on the track has started.

It allows your frequency and power to be changed by button or smartaudio, and is the perfect choice for small and lightweight racing drones.

INPUT VOLTAGE: 5V ONLY CHANNEL :37CH WEIGHT: 1.4g
 POWER: PIT/25mW/100mW/200mW/MAX*
 *350mW MAX, varies with airflow conditions.



PAD DEFINITION

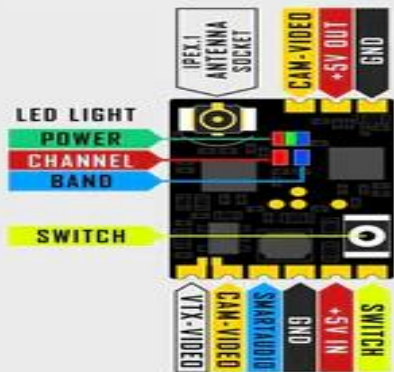

SETUP FLOWCHART



FREQUENCY TABLE

CH	BAND A	BAND B	BAND E	BAND F	RaceBAND	Low Race
1	5865	5733	5705 ⓘ	5740	5658 ⓘ	5362
2	5845	5752	5685 ⓘ	5760	5695 ⓘ	5399
3	5825	5771	5665 ⓘ	5780	5732 ⓘ	5436
4	5805	5790	5645	5800	5769	5473
5	5785	5809	5885 ⓘ	5820	5806	5510
6	5765	5828	5905 ⓘ	5840	5843	5547
7	5745	5847	5925	5860	5880 ⓘ	5584
8	5725 ⓘ	5866	5945	5880 ⓘ	5917 ⓘ	5621

The selections in ⓘ requires HAM license to operate legally. Selections in grey are only available on special request.

WIRING DIAGRAM

